
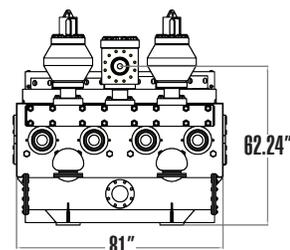
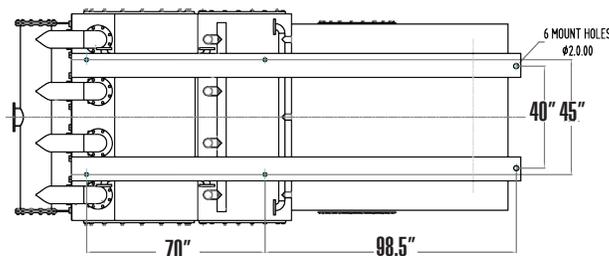
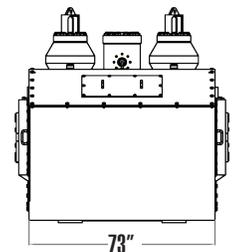
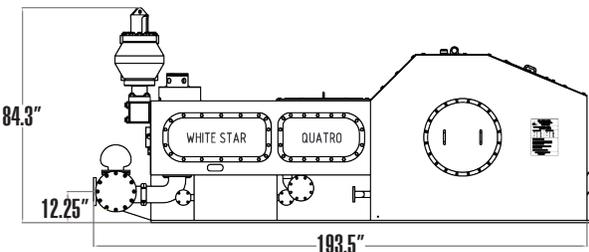


QUATRO 2000 HP PERFORMANCE CHART

Stroke per min.			145	120	90	50
2000 hp	Hydraulic hp		1800	1486	1114	619
Liner size in. (mm)	Gal/stk (Liters/stk)	Max discharge pressure PSI (kg/cm ²)	GPM - Gallons per minute (LPM - Liters per minute)			
9* (228.6)	11.02 (41.70)	1926 (142)	1602 (6063)	1322 (5003)	991 (3753)	551 (2085)
8* (203.2)	8.70 (32.94)	2438 (179)	1266 (4790)	1044 (3953)	783 (2965)	435 (1647)
7 (177.8)	6.66 (25.22)	3184 (234)	969 (3667)	800 (3027)	599 (2268)	333 (1261)
6 (152.4)	4.90 (18.53)	4334 (318)	712 (2694)	588 (2224)	441 (1665)	245 (927)
5 (127)	3.40 (12.87)	6241 (458)	494 (1871)	408 (1544)	305 (1158)	170 (643)
4 (101.6)	2.18 (8.24)	7500 (551)	316 (1198)	261 (988)	196 (741)	109 (412)

*Only available with the "X" module. Rated strokes and horsepower 145 SPM @ 2000 Input horsepower. Liners available in 1/2" sizes.
 Hydraulic horsepower & flow rate based upon 90% mechanical efficiency and 100% volumetric efficiency.
 All data subject to change without notification

Max input hp	2000
Pump speed	145 SPM
Stroke length	10" (254 mm)
Max. piston size	9" (228.6 mm)
Min. piston size	4" (101.6 mm)
Fluid end working pressure	7500 PSI (51.71 Mpa)
Max. flow rate	1597 GPM (6046 LPM)
Width	84" (2,133 mm)
Length	193" (4,902.2 mm)
Height	84.5" (2,146.3 mm)
Weight complete*	53,500 lbs (24,267 Kg)

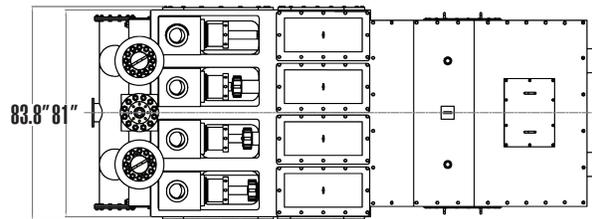

*Complete pump weight includes: pulsation dampeners, suction desurgers, liners, discharge manifold, suction manifold, and strainer cross